

# AIRPAX DIMENSIONS

www.airpaxdimensions.com


1-800-553-6418  
4467 White Bear Pkwy.  
St. Paul, MN 55110-7626  
Fax: 651-653-7600

## LED Signal Battery Backup System 24-Volt (for mounting in external cabinet)

**Output Voltage:** 120 VAC regulated (110 to 125VAC)  
**Output Frequency:** 60 Hz  $\pm$  0.05%  
**Output Waveform:** Pure sine wave, less than 3% THD  
**Input Voltage: (VDC)** 21 to 28  
**Operating Temperature:** -37° to 74° C (-35° to 165° F)  
**Efficiency:** Up to 85%

### Other Design Features:

- LISTED Power Supply (BBS) for use with Traffic Signal Equipment. File: QQIJ, E218390
- Thermally-controlled cooling fan
- Automatic utility line power bypass when utility line voltage is outside the range of 100 to 130 VAC  $\pm$  2 VAC
- Automatic inverter mode dropout when utility line power has been restored above 105 VAC  $\pm$  2 VAC for more than 30 seconds
- Lightning surge protection compliant with IEEE 587/ANSI C.62.41
- Completely connectorized system
- LED indication for Inverter Power, Low Battery, High Temp, & Overload
- LED for Battery Charger On & Full plus Check Batteries
- LED Battery Voltage Indicator & Voltage Test Points
- LED for Relay A (On Batt), Relay B (Low Batt), and Relay C (2 hour Time)
- Two terminal blocks provide access to BBS Form C dry relay contacts
- Low Batt voltage threshold (Relay B) is adjustable
- Inverter Run Time Meter w/reset
- Inverter Event Counter Meter w/reset

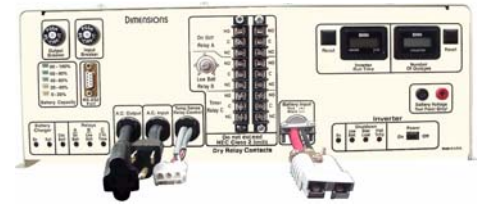

### Unit Protection:

- Automatic electronic short circuit/overload protection
- Automatic over temperature shutdown
- Input and Output circuit breakers

### Battery Protection:

- Automatic low battery shutdown at 21 VDC
- In-line battery cable fuse
- Remote temperature sense cable
- Temperature compensated battery charging system - shuts off over 50°C (122°F)

### Communication:

- RS232 Communications port provides local programming, BBS status, and download of event buffer via a Windows based PC.

<b>MODEL NUMBER</b>	<b>24M11</b>
<b>Output Power</b> (Watts Continuous)	1,100 @ 25°C (77°F), 700 @ 74°C (165°F)
<b>Output Current</b> (Amps AC)	Up to 9
<b>Peak Output</b> (Amps AC)	37
<b>Input Current</b> (Amps DC)	Up to 55
<b>Weight</b> (Lbs.)	42
<b>Dimensions (WxDxH)</b> (inches)	16½ x 12 x 6
<b>BATTERY CHARGER</b>	
<b>Output Voltage</b> (Volts DC)	Regulated and temperature compensated end of charge at 27.6
<b>Output Current</b> (Amps DC)	Up to 13
<b>Input Current</b> (Amps AC)	Up to 7
<b>TRANSFER RELAY</b>	
<b>Current Rating</b> (Amps AC)	15
<b>Transfer Time</b> (milliseconds)	40 typical